

# SPD3000C

## Series

### Programmable DC Power Supply



Data Sheet-2018.04

## Main Features

- ⚡ 3 independent controlled and isolated output: 32 V/3.2 A×2, 2.5 V/3.3 V/5 V/3.2 A×1, total power 220 W.
- ⚡ Resolution:10 mV/10 mA
- ⚡ Supports panel timing output functions.
- ⚡ LED display; 32 V full scale, 4 digits; 3.2 A full scale, 3 digits
- ⚡ 100 V/120 V/220 V/230 V compatible design, to meet the needs of different power grids.
- ⚡ Intelligent fan for temperature control, effectively reduces noise.
- ⚡ Five groups of internal system parameter storage. Supports data storage space expansion.
- ⚡ Supports SCPI commands & USB device interface. Includes PC software.

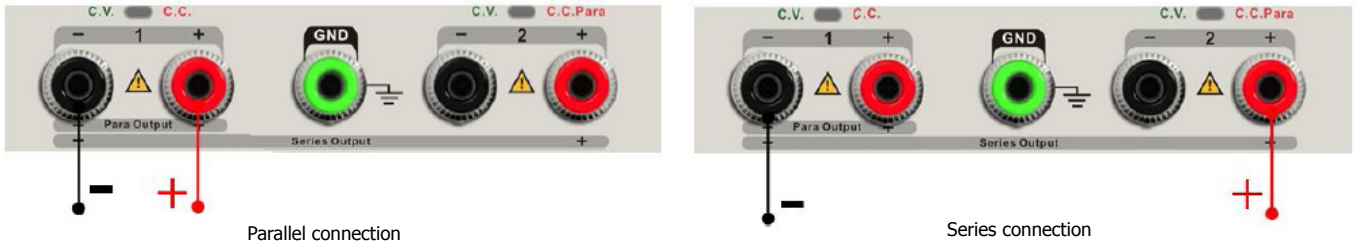
## Design Features

### ⚡ High-resolution and high-precision output





High precision adjustability of as low as 10 mV & 10 mA steps. User’s DUT can be monitored and analyzed under small changes in voltage and current.

### ⚡ Series/parallel/independent mode functions

Series and parallel functions allows two channels to be easily combined into one output with more power output ability, doubling the supplied voltage or current. Each of the 3 channel’s outputs can be turned on/off independently or all 3 turned all-on/all-off simultaneously.



## Application Field

-  Debugging in R&D
-  Production / Automatic Test
-  Quality Control and Test
-  Teaching / Education

## Specification

Model		SPD3303C
Output		CH1 Output Current:0~3.2 A CH2 Output Voltage:0~32 V CH2 Output Current:0~3.2 A CH3 Output Voltage:2.5 V/3.3 V/5 V CH3 Output Current:3.2 A
Display		32 V full scale 4 digits 3.2 A full scale 3 digits LED display
Resolution		10 mV/10 mA
Program Accuracy		V: $\pm (0.5\% \text{ of reading} + 3 \text{ digits})$ I: $\pm (0.5\% \text{ of reading} + 3 \text{ digits})$
Readback Accuracy		V: $\pm (0.5\% \text{ of reading} + 3 \text{ digits})$ I: $\pm (0.5\% \text{ of reading} + 3 \text{ digits})$
Constant Voltage Mode	Line Regulation	$\leq 0.01\% + 3 \text{ mV}$
	Load Regulation	$\leq 0.01\% + 3 \text{ mV}$
	Ripple & noise	$\leq 1 \text{ mVrms (5 Hz} \sim 1 \text{ MHz)}$
	Recovery time	$< 50 \mu\text{s (50\% load change, Minimum load 0.5 A)}$
Constant Current Mode	Line Regulation	$\leq 0.2\% + 3 \text{ mA}$
	Load Regulation	$\leq 0.2\% + 3 \text{ mA}$
	Ripple & noise	$\leq 3 \text{ mArms}$
Parallel Mode	Line Regulation	$\leq 0.01\% + 3 \text{ mV}$
	Load Regulation	$\leq 0.01\% + 3 \text{ mV}$
Series Mode <sup>[1]</sup>	Line Regulation	$\leq 0.01\% + 5 \text{ mV}$
	Load Regulation	$\leq 300 \text{ mV}$
CH3	Output	$(2.5 \text{ V}/3.3 \text{ V}/5 \text{ V}) \pm 8\%$
	Line Regulation	$\leq 0.01\% + 3 \text{ mV}$
	Load Regulation	$\leq 0.01\% + 3 \text{ mV}$
	Load Regulation	$\leq 1 \text{ mVrms (5 Hz} \sim 1 \text{ MHz)}$
Locking key		Yes
Memory Save/Recall		5 sets
Max Output Power		220 W
Power Source		AC 100 V/120 V/220 V/230 V $\pm 10\%$ 50/60 Hz
Interface		USB Device
Insulation		Case to Terminal: $\geq 20 \text{ M}\Omega$ (DC 500 V) Case to AC line: $\geq 30 \text{ M}\Omega$ (DC 500 V)
Operating environment		Outdoor usage: Elevation: $\leq 2000 \text{ m}$ Environment Temp: $0 \sim 40 \text{ }^\circ\text{C}$ Relative Humidity: $\leq 80\%$ Installation Level: II Pollution Level: 2
Storage Environment		Environment Temp: $-10 \sim 70 \text{ }^\circ\text{C}$ Relative Humidity: $\leq 70\%$
Size		275 $\times$ 225 $\times$ 136 mm
Weight		7.5 Kg

Remark:

[1]The SPD can output 60V voltage maximum in the Series mode.

# SPD3000C Series Programmable DC Power Supply

## About SIGLENT

SIGLENT is an international high-tech company, concentrating on R&D, sales, production and services of electronic test & measurement instruments.

SIGLENT first began developing digital oscilloscopes independently in 2002. After more than a decade of continuous development, SIGLENT has extended its product line to include digital oscilloscopes, function/arbitrary waveform generators, digital multimeters, DC power supplies, spectrum analyzers, isolated handheld oscilloscopes and other general purpose test instrumentation. Since its first oscilloscope, the ADS7000 series, was launched in 2005, SIGLENT has become the fastest growing manufacturer of digital oscilloscopes. We firmly believe that today SIGLENT is the best value in electronic test & measurement.

### Headquarter:

SIGLENT TECHNOLOGIES CO., LTD.  
Add: Blog No.4 & No.5, Antongda Industrial Zone, 3rd Liuxian Road, Bao'an District, Shenzhen, 518101, China.  
Tel: + 86 755 3661 5186  
Fax: + 86 755 3359 1582  
Email: sales@siglent.com;  
Website: <http://www.siglent.com/ens/>

### USA:

SIGLENT Technologies America, Inc  
6557 Cochran Rd Solon, Ohio 44139  
Tel: 440-398-5800  
Toll Free: 877-515-5551  
Fax: 440-399-1211  
Email: info@siglent.com  
Website: [www.siglentamerica.com](http://www.siglentamerica.com)

### Europe:

SIGLENT TECHNOLOGIES EUROPE GmbH  
ADD: Liebigstrasse 2-20, Gebaeude 14,  
22113 Hamburg Germany  
Tel: +49(0)-819-95946  
Fax: +49(0)-819-95947  
Email: info-eu@siglent.com  
Website: [www.siglenteu.com](http://www.siglenteu.com)

Follow us on  
Facebook: SiglentTech

